




JL INDUSTRIES

CORNER GUARD SYSTEMS

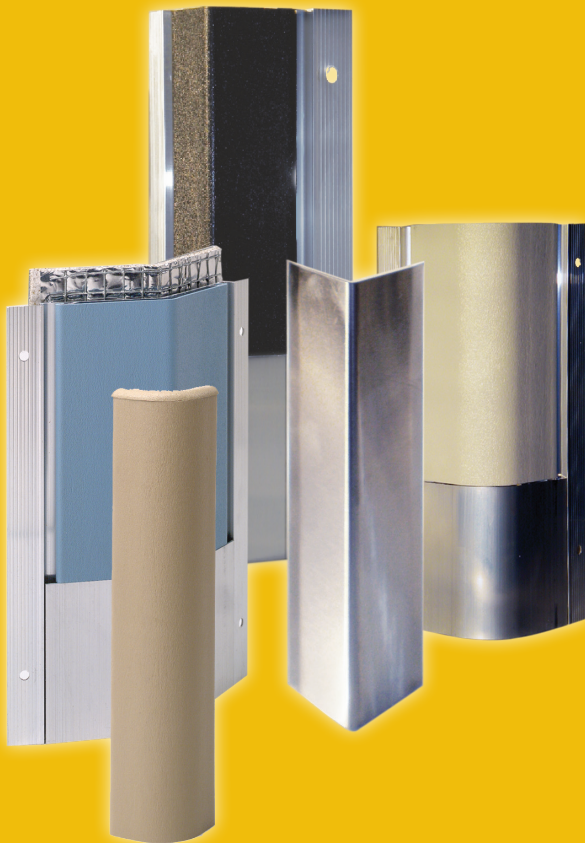

**Division 10 26 13
Corner Guards**

ACTIVAR
INC.


www.activar.com

Construction Products Group



SAF-T-GUARD SYSTEMS


VINYL CORNER GUARD SYSTEM: SGV Series



SGVS-90-2



SGVR-90-2



Construction: Continuous aluminum retainer with high-impact vinyl acrylic cover completely conceals frame. Installations less than 8' high provided with end cap.

Length: 48" standard". Up to 20'.

Wing Length: 2" and 3".

Angle: 90° (2" & 3" wing), 135° (3" wing).

Corner Type: Square (S), Radius (R) or Endwall (EW).

Mounting: Installed with screws through aluminum retainer to wallboard surface.

Flame Resistance: Meet Class 1/A requirements for flame spread and smoke density.


FLUSH VINYL CORNER GUARD SYSTEM WITH ALUMINUM BASE & WALLBOARD BEAD: SGVA Series



SGVAS-90-3



SGVAR-90-3



Construction: Continuous aluminum retainer with 4" cover base. High-impact vinyl acrylic cover snaps into place concealing frame except for 3/16" trim.

Length: 48" standard". Up to 20'.

Wing Length: 2" and 3" with 13/16" tapered wallboard bead for taping over frame.

Angle: 90° (2" & 3" wing), 135° (3" wing).

Corner Type: Square (S), Radius (R), or Endwall (EW).

Mounting: Installed with screws through aluminum retainer to wallboard surface.

Flame Resistance: Meet Class 1/A Requirements for Flame Spread and Smoke Density.


FLUSH VINYL CORNER GUARD SYSTEM 1 OR 2 HR FIRE-RATED WITH ALUMINUM BASE & WALLBOARD BEAD: SGVAF Series



SGVAF1R-90-3



SGVAF2S-90-3



Construction: Continuous aluminum retainer with 4" cover base. High-impact vinyl acrylic cover snaps into place concealing frame except for 3/16" trim.

Fire-Rated Insulation: 1 or 2 hour fire-rated material is adhered to the wall side of the corner guard.

Length: 48" standard". Up to 20'. 

Wing Length: 2" and 3" with 13/16" tapered wallboard bead for taping over frame.

Angle: 90° (2" & 3" wing), 135° (3" wing).

Corner Type: Square (S) or Radius (R) or Endwall (EW).

Mounting: Installed with screws through aluminum retainer to wallboard surface.

Flame Resistance: Meet Class 1/A Requirements for Flame Spread and Smoke Density.

Ordering: Use SGVAF1 for 1 Hour and SGVAF2 for 2 Hour.

Endwalls Includes Matched Sheet Wall Protection



SCVA-EW



SCVEW

Color Selection for All Models on This Page: See Page 2

